

SPECIFICATION

VOLTAGE
12.8v

CCA (EN)
350A

CHARGING CURRENT STD.
2.5A


CAPACITY (10h)
5.0Ah

ENERGY
64.0Wh

CHARGING CURRENT MAX.
10.0A

DIMENSIONS & WEIGHT

LENGTH	150±2mm
WIDTH	65±2mm
TOTAL HEIGHT	130±2mm
GROSS WEIGHT	0.83kg

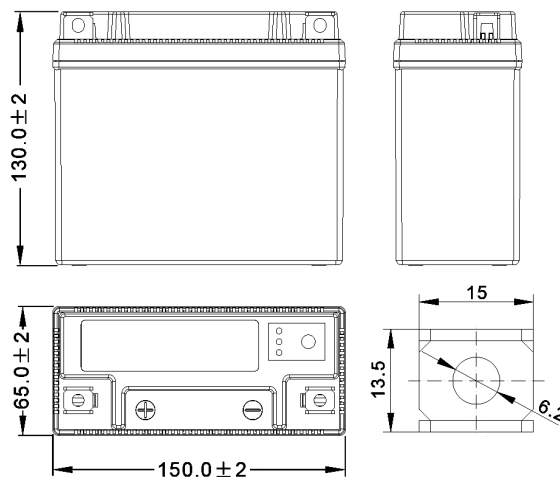

NON-SPILLABLE

LiFePO4

TERMINAL

Front



Side



Top



3D



FEATURES

- EQUIVALENT LEAD ACID BATTERY TYPES: FT12B-4; FT14B-4; FT12B-BS; FT14B-BS
- OUTSTANDING SAFETY FEATURES
- ULTRA LIGHT WEIGHT
- MAINTENANCE FREE AND READY TO USE
- FAST CHARGING CAPABILITIES
- HIGH COLD CRANKING PERFORMANCE
- LONG SHELF-LIFE
- VERY LOW SELF-DISCHARGE
- ENVIRONMENTAL FRIENDLY
- COVER MOST OF EXISTING PARC APPLICATION
- EFFICIENT CHARGING INDICATOR

POLARITY



MOUNTING ANGLES

