



## LTO Technology

| Model                    | LTO1203Pro       |
|--------------------------|------------------|
| Nominal voltage          | 12V              |
| Rated Capacity           | 36Wh             |
| Lead acid equivalent     | Pb Eq 10-12Ah    |
| Cranking amps            | 450CA            |
| Recommend charge current | 15A              |
| Max charging current     | 30A              |
| Standard charge voltage  | 13.5V            |
| Max charge voltage       | 14.5V            |
| Operating Temperature    | -30 °C to +50 °C |
| Storage Temperature      | +15°C to +35 °C  |
| Dimension                | L135*W75*H139mm  |
| Weight                   | 1.3KG            |

## Dimension

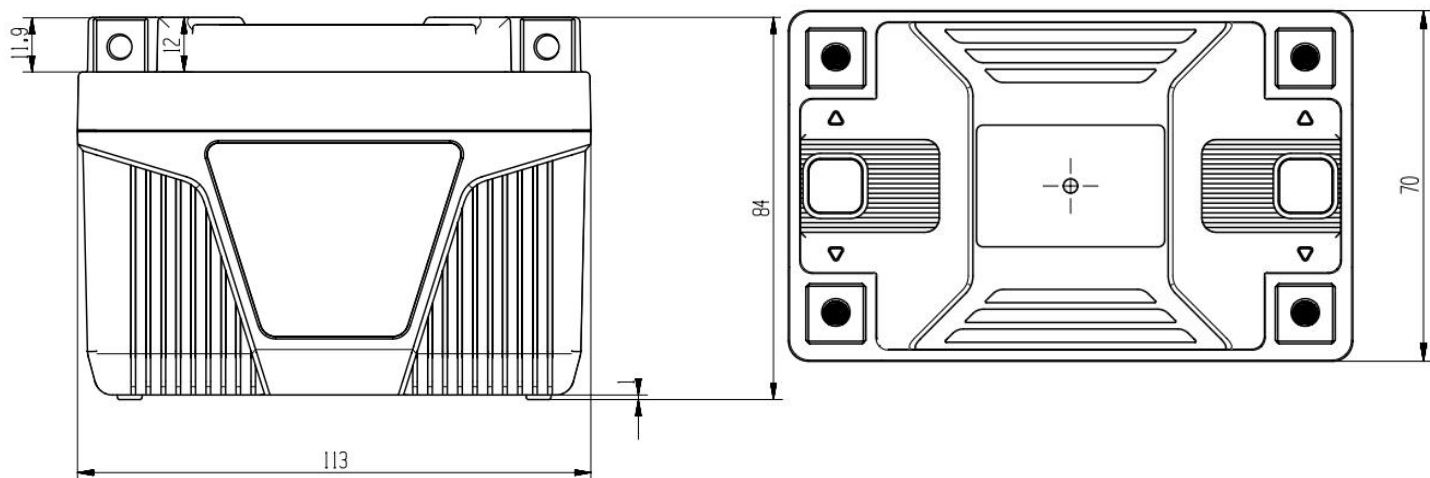

# Advantage

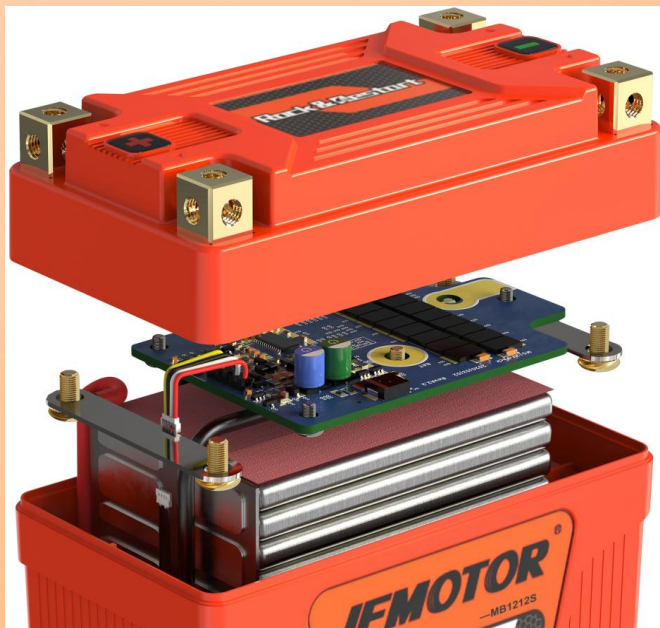

01

Patent design with LTO technology, 30000 cycles life time, high charge and discharge rate;

02

Amazing Low/High Temperature Performance at -30°C ~50°C;

03

Incredibly light weight, the power and storage is unmatched;

04

LTO is very safe and rugged, super high power/Low inner resistance;

05

4 Copper terminal design for flexible installation and superior conductivity;

06

Low self-discharge, it can hold a charge up to a year if there are no "Parasitic Drains".

# Application



Motorcycle



UTV



ATV



Race car



Snowmobile



Watercraft

## Lead acid replacement

BTZ4L-BS, BTZ5S,  
BTZ5L-BS, BTZ7S,  
BTZ7L-BS, BTZ8V

YTX4L-BS, YTZ5S-BS,  
YTX5L-BS, YTZ7S,  
YTZ7L-BS, YTZ8V.

IF MOTOR Motorcycle batteries are guaranteed by the People's Insurance Company of China

web: <https://www.ifmotorbattery.com/>

contact: [sales02@ifmotorbattery.com](mailto:sales02@ifmotorbattery.com)