FDC6-245 Datasheet









FDC Series are Deep Cycle AGM Carbon batteries specifically designed for frequent discharge deep cycle application. With non-spillable design and maintenance free, AGM FDC Series offer low self-discharge and ensure a maximum service life with high resistance to cycles. Thanks to carbon additives, these batteries can perfectly be used with good performance without being 100% charged. This range offers reliable performance for electric vehicle and other applications such as golf cart, aerial work platform, cleaning machine, marine, solar energy...

₼ **FEATURES**

- Deep Cycle AGM technology (VRLA)
- Non-spillable & maintenance free
- No acid handling
- Deep Cycle design for high capacity and maximum life
- Reinforced grid/plates design for optimal cyclic use
- Robust, safe & reliable
- Carbon additives to perform in Partial State of Charge (PSOC) and to increase charging efficiency
- Low self-discharge rate for longer shelf life

Voltage Capacity Reserve capacity 6 V 270 Ah (100hr) 530 min (25A) 245 Ah (20hr) 145 min (75A)

> 232 Ah (10hr) 210 Ah (5hr)

OPERATING TEMPERATURE


Discharge	-15°C ~ 50°C
Charge	0°C ~ 40°C
Storage	-15°C ~ 40°C


CHARGING INSTRUCTIONS


Max current	61A
Float	6.8V - 6.9V
Cyclic	7.2V - 6.35V

DIMENSIONS & WEIGHT

Length	243±2mm
Width	187.5±2mm
Total Height	275±2mm
Gross weight	32.4kg








A TERMINAL





APPLICATIONS



Aerial work Golf cart platform





Floor cleaning machine










FDC6-245

Datasheet



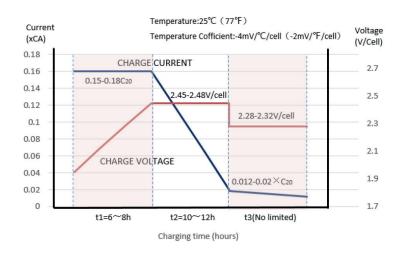

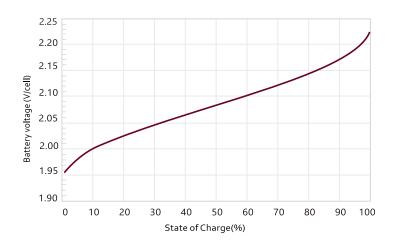

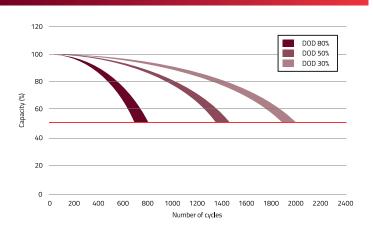

SELF-DISCHARGE CHARACTERISTIC

